



FIGURE 1

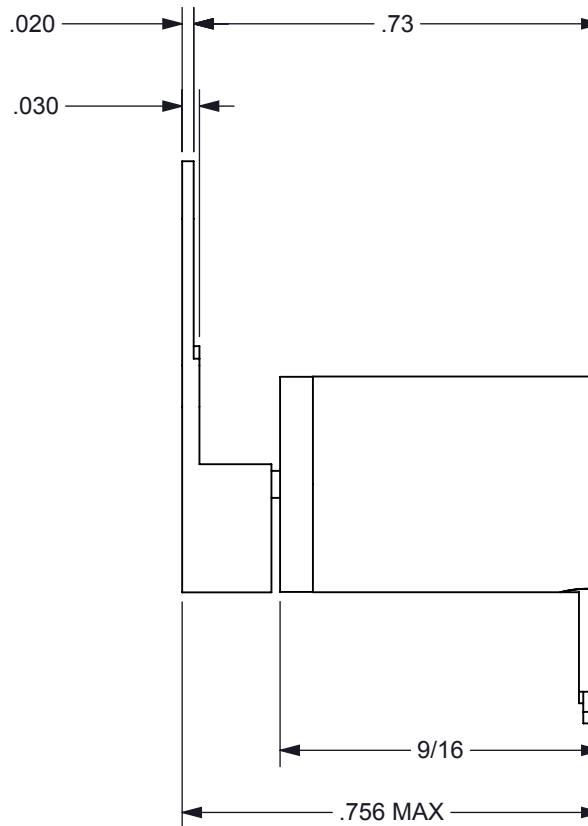

PROPRIETARY DOCUMENT

SPECIFICATIONS

- | | |
|--------------------|--|
| 1. PRODUCT TYPE | SELF RESTORING SHUTTER |
| 2. TEMPERATURE | -40°C TO +100°C OPERATING RANGE |
| 3. TRAVEL | 32.5 ± 2° CCW FROM POSITION SHOWN IN FIGURE 1 |
| 4. ROTATION | CCW / RED (+) BLACK (-) |
| 5. VOLTAGE | 5.0 VDC ± 5% |
| 6. COIL | 75Ω ± 10% @ 25°C (CLASS H) |
| 7. LEADS | RED AND BLACK 30 ET TEFLON INSULATED WIRE PER M16878/6 |
| 8. LEAD LENGTH | 6" MINIMUM |
| 9. HOUSING FINISH | BLACK ANODIZE PER MIL-A-8625F, TYPE II, CLASS II |
| 10. SHUTTER FINISH | BLACK ANODIZE PER MIL-A-8625F, TYPE II, CLASS II |

DIMENSION TOLERANCES UNLESS OTHERWISE SPECIFIED			
ANGLES	± 1°	2 PLACES	± .010
FRACTIONS	± 1/32	3 PLACES	± .005
	± .015	4 PLACES	± .0005
MATERIAL:	N/A		DRAWN: C.G.S.
FINISH:	SEE NOTES 9 & 10		CHECKED: P.T.
DATE: 11/17/11	SCALE: NONE	APPROVED: R.L.R./T.G.A.	
TITLE: SELF RESTORING SHUTTER	DWG NO: A0536-2	SHEET: 1 of 1	REV: